



Compact Controller HY-TTC 30S-H

Functional safety
PL c

Description

The HY-TTC 30S-H is a compact controller, based on an Infineon XC22xx microcontroller, which was specially designed for use in low-cost applications or smaller machines. Twenty-eight freely configurable I/Os enable it to be operated with a wide variety of sensors and actuator types.

The HY-TTC 30S-H module was developed in accordance with the international standard ISO/EN 13849 and is certified by TÜV Nord. It meets the requirements of Functional Safety according to **PL c** (Performance Level c).

The HY-TTC 30S-H version is best suited to controlling proportional functions. Six out of the eight PWM outputs have integrated current measurement which means that up to three hydraulic axes can be current-controlled.

The module is protected in a proven, robust and compact housing, specially designed for the off-highway automotive industry.

Special features

- **PL c certified to EN ISO 13849**
- 30 inputs and outputs:
 - 10 analogue inputs
 - 4 timer inputs
 - 8 PWM outputs, high-side:
 - 6 with integrated current measurement
 - 2 digital outputs, low-side
 - 6 ratiometric voltage outputs
- Robust, very compact die-cast aluminium housing
- Waterproof, 48-pin male connection

Technical data


Environmental conditions	
Operating temperature	-40 .. +85 °C (with full load)
Operating altitude	0 .. 4,000 m
Supply voltage	8 .. 32 V
Peak voltage	40 V max.
Idle current	40 .. 120 mA
Standby current	≤ 1 mA
Current consumption	24 A max.
Fulfils the following standards	
CE mark	Compliant with 2014/30/EU, 2006/42/EC
E-mark	ECE-R10 Rev.4
Functional safety	EN ISO 13849 - PL c -
EMC	EN 13309/ISO 14982/CISPR 25
ESD	ISO 10605
Electrical	ISO 16750-2/ISO 7637-2/-3, limited to 40 V with external load dump protection
Protection class	EN 60529 IP 67/ISO 20653 IP 6K9K
Temperature	ISO 16750-4
Vibration, shock, bump	ISO 16750-3
Dimensions and weight	
Housing dimensions	147 x 92 x 38 mm
Minimum clearance for connection	208 x 92 x 38 mm
Weight	330 g
Features ¹⁾²⁾³⁾⁴⁾	
Infineon XC 22xx microcontroller, 80 MHz, 768 kB int. Flash, 82 kByte int. RAM, 8 kByte EEPROM	
1 x CAN, 50 kbit/s .. 1 Mbit/s, termination configurable via pin	
IN	
6 x Analogue IN 0 .. 5 V/0 .. 10 V/0 .. 25 mA or 25 mA LED lamps OUT configurable via software, PL c capable	
2 x Analogue IN 0 .. 5 V/0 .. 10 V/0 .. 25 mA / 0 .. 65 kOhm or 25 mA LED lamps OUT configurable via software, PL c capable	
2 x Analogue IN 0 .. 32 V with configurable pull-up/down, digital input mode, PL c capable	
4 x Timer IN (Timer inputs 0.1 Hz .. 10 kHz) / Analogue IN 0 .. 32 V, 1 encoder configurable pull-up/down in digital input mode, PL c capable	
OUT	
6 x PWM OUT / Digital OUT 3 A high-side, current measurement, overload and wirebreak detection configurable as Timer IN (10 Hz .. 10 kHz)/Analogue IN 0 .. 32 V with integrated pull-up, PL c capable	
2 x PWM OUT / Digital OUT 3 A high-side, current measurement, overload and wirebreak detection configurable as Timer IN (10 Hz .. 10 kHz)/Analogue IN 0 .. 32 V with integrated pull-up, PL c capable	
2 x Digital OUT 3 A low-side, for use as safety switch for high-side PWM OUTs ⁵⁾	
6 x Analogue OUT 15 % .. 85 % V _{BAT+} (ratiometric) configurable as 0 V .. 75 % V _{BAT+} with 10 kOhm low-side load or Analogue IN 0 .. 32 V	
Dedicated power supply pins for high-side outputs	
Internal monitoring of board temperature, sensor supply, K15 input and battery voltage	
1 x sensor supply 5 V (100 mA)	
Programming: C	

Note:

- ¹⁾ All I/Os and interfaces are protected against short circuit to GND and BAT+.
- ²⁾ All analogue inputs have 10-bit resolution.
- ³⁾ All analogue inputs can be used as digital inputs with configurable switching thresholds.
- ⁴⁾ All inputs can be used for functional safety, if two inputs of the same type are connected in parallel for redundancy.
- ⁵⁾ These outputs are part of the safety design and cannot be controlled directly via the software.

Block circuit diagram

HY-TTC 30S-H

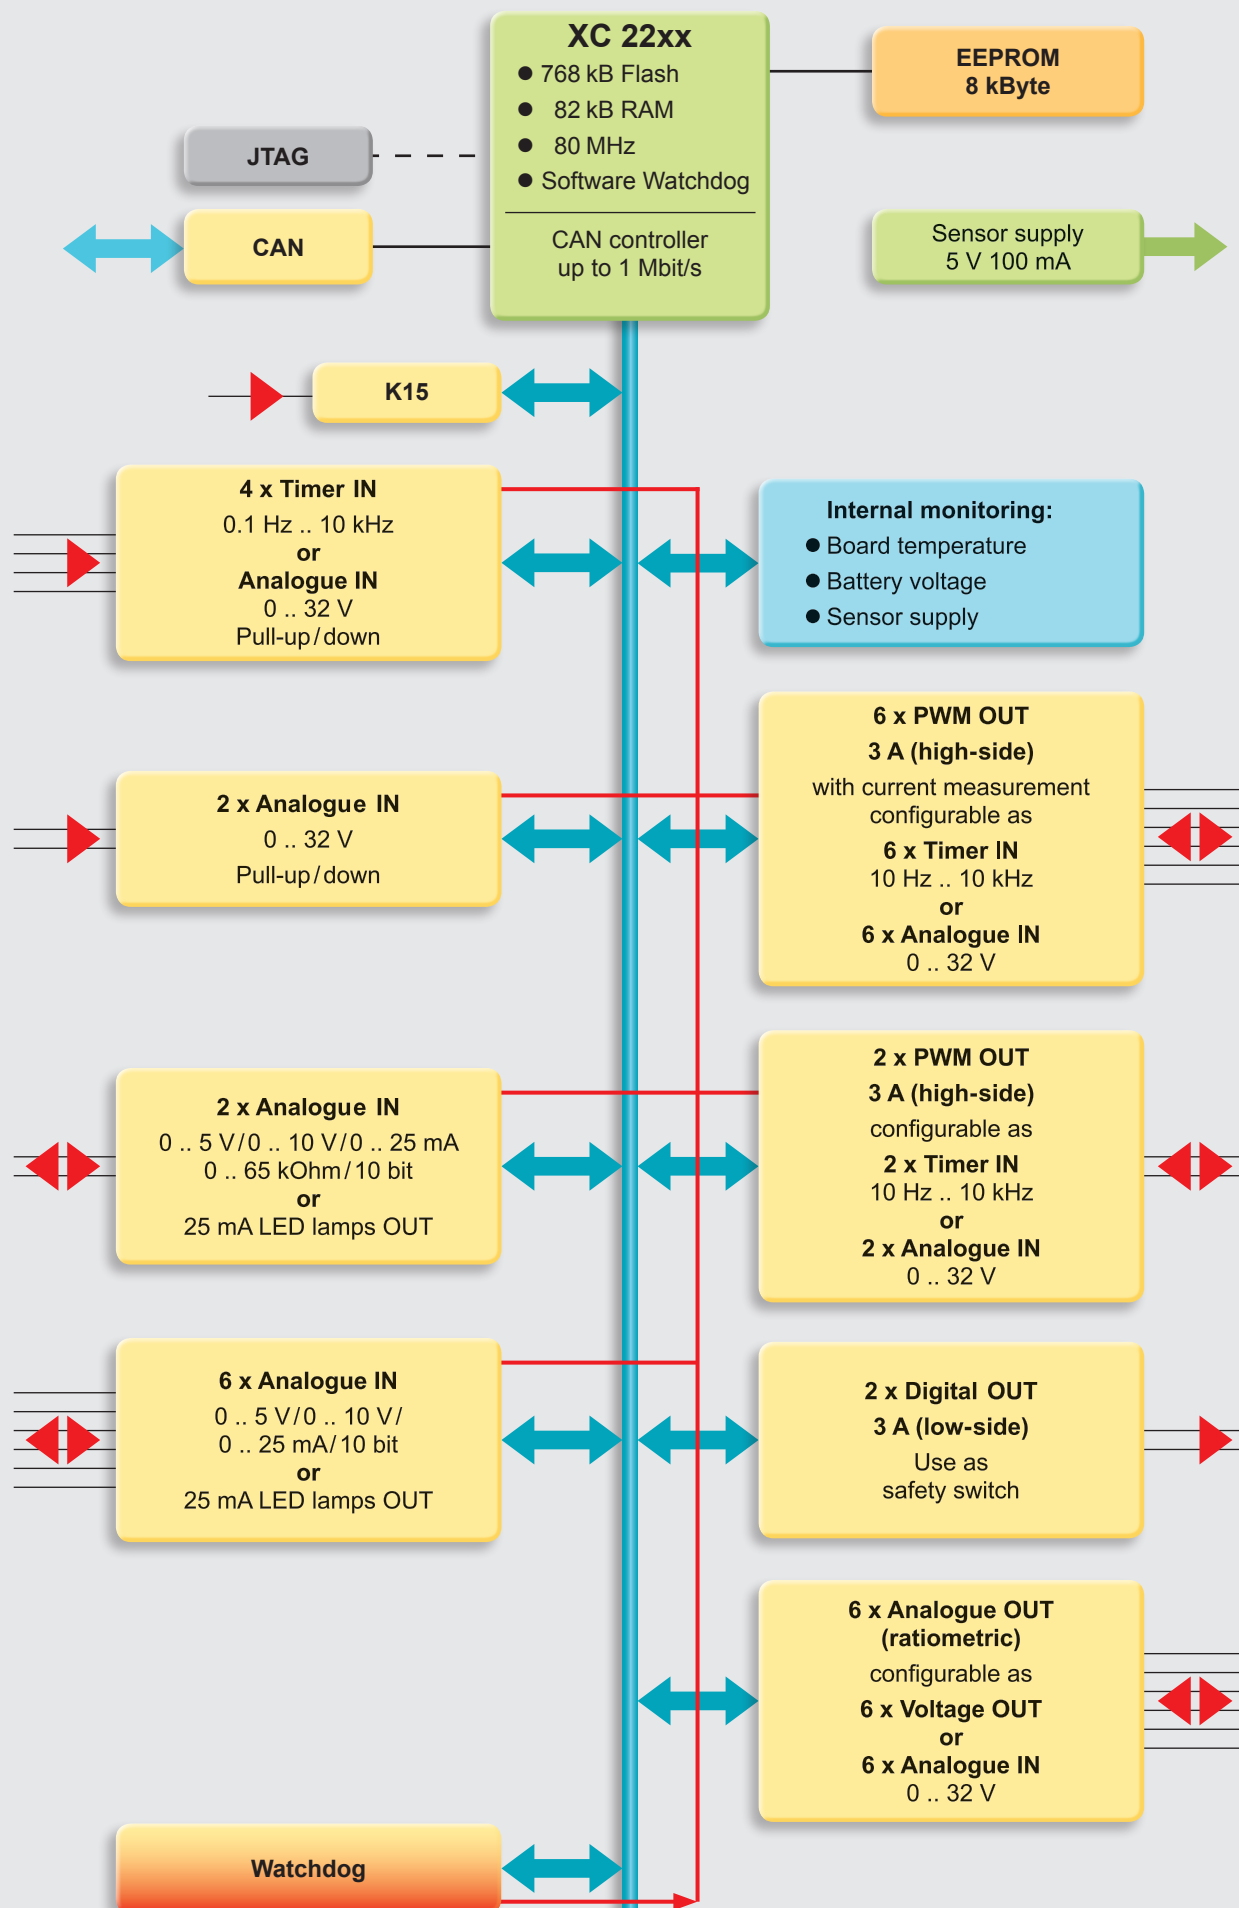

Model code

HY-TTC 30S – H – XX – XX – Pc – 000

Firmware

CP = C programming

Equipment option

00 = standard

10 = developer version

Functional safety

Pc = requirements for PL c

Modification number

000 = standard

Note

On devices with a different modification number, please read the name plate or the technical amendment details supplied with the device.

Accessories

Appropriate accessories, such as cable harnesses, cabling and connection technology, service tools and software can be found in the Accessories section.


Note

The information in this brochure relates to the operating conditions and applications described.

For applications or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications and corrections.

Dimensions

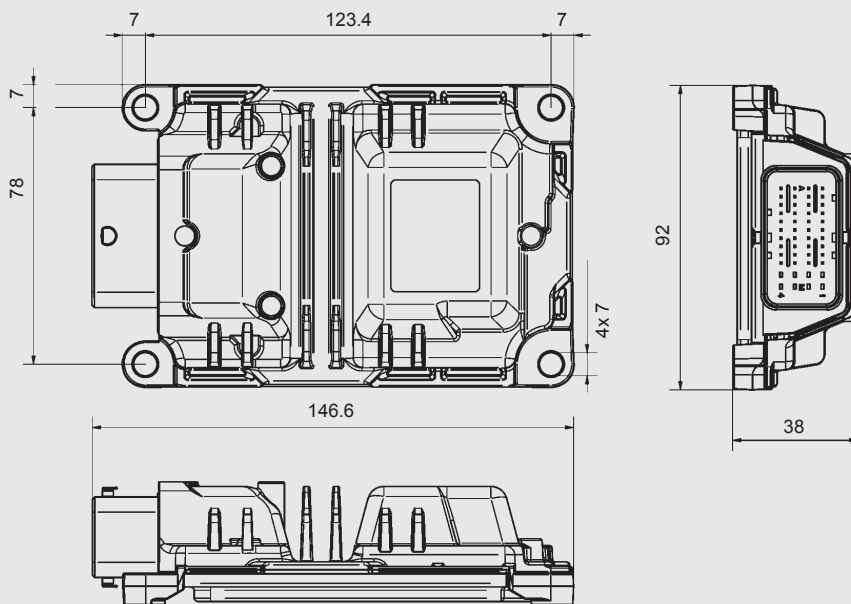

HYDAC ELECTRONIC GmbH

Hauptstr. 27
66128 Saarbrücken, Germany
Tel. +49 6897 509-01
Fax +49 6897 509-1726
E-mail: electronic@hydac.com
Internet: www.hydac.com

