



## Pressure switches

### EDS 3400

IO-Link interface

Relative pressure

Display



#### Features

- IO-Link interface
- Parameterisation and cyclical transmission of process and service data
- Simplified installation and commissioning
- With display
- The display can be moved in two planes.
- Any installation position

#### Description

The EDS 3400 with IO-Link communication interface is a compact electronic pressure switch with integrated digital display for relative pressure measurement in the low and high-pressure range.

The instrument has a switching output and an additional output that can be configured as switching or analogue (4 .. 20 mA or 0 .. 10 V).

IO-Link is the communication between the sensor/actuator (IO-Link device) and an IO-Link master based on a point-to-point interface.

The advantages:

- Process data, parameters and diagnostic information of the pressure switch can be transmitted via a standard cable (SDCI mode). The integrated LED display provides information on the operating mode and the switching statuses.
- Simple exchange: The IO-Link master is able to save the parameters of the connected pressure sensor and to transmit them to the newly connected pressure sensors when replaced. Thus, time-consuming new parameterisations will no longer be required.

If IO-Link is not used, depending on the settings, the sensor functions as a pressure switch with two switching outputs or with 1 switching output and 1 analogue output (SIO mode).

To create customer-specific small series or to duplicate sensor settings across the system, the sensor can also be adjusted very conveniently outside the system to suit the particular application, by means of the HYDAC programming device HPG P1-000, the HYDAC programming adapter ZBE P1-000 or by means of the portable measuring unit HMG 4000.

#### Application fields

Typical fields of application for EDS 3400 IO-Link are machine tools, handling and assembly automation, intralogistics or the packaging industry. User-specific customised versions (e.g. monitoring systems for hydro accumulators or for the control of the accumulator charging function) are available.

The bidirectional communication with the sensors and actors on the lowest field level via IO-Link enables new services such as remote diagnosis, remote service, condition-based predictive maintenance.

## Technical details

Input data													
Measuring ranges <sup>1)</sup>	bar	-1..1	2.5	6	10	16	25	40	100	250	400	600	1000
Overload pressures	bar	5	5	12	20	32	50	80	200	500	800	1000	1200
Burst pressure	bar	100	100	100	100	100	200	200	500	1250	2000	2000	3000
Mechanical connection	See model code												
Tightening torque, recommended	20 Nm (G1/4); 45 Nm (G1/2)												
Parts in contact with fluid	Mech. connection: stainless steel Seal: copper (G1/2) / FKM												
Output variables													
Output signals	Output 1: switching output Output 2: configurable switching output or as analogue output												
Switching outputs	PNP Transistor switching output Switching current: SP1: max. 1.2 A / SP2: max. 0.25 A Switching cycles: > 100 million												
Analogue output, permitted load resistance	Selectable:	load resist.: max. 500 Ω load resist.: min. 1 kΩ											
		4 .. 20 mA											
		0 .. 10 V											
Accuracy acc. to DIN 16086, terminal based	≤ ± 0.5 % FS typ. ≤ ± 1.0 % FS max.												
Temperature compensation zero point	≤ ± 0.015 % FS / °C typ. ≤ ± 0.025 % FS / °C max.												
Temperature compensation span	≤ ± 0.015 % FS / °C typ. ≤ ± 0.025 % FS / °C max.												
Repeatability	≤ ± 0.25 % FS max.												
Reaction time	< 10 ms												
Long-term drift	≤ ± 0.3 % FS typ. / year												
Ambient conditions													
Compensated temperature range	-10 .. +70 °C												
Operating temperature range	-25 .. +80 °C (-25 to +60 °C acc. to UL spec.)												
Storage temperature range	-40 .. +80 °C												
Fluid temperature range	-25 .. +80 °C												
CE mark	EN 61000-6-1 / 2 / 3 / 4												
UL mark <sup>2)</sup>	Certificate no.: E318391												
Vibration resistance acc. to DIN EN 60068-2-6 at 10 .. 500 Hz	≤ 10 g												
Shock resistance acc. to DIN EN 60068-2-27 (11 ms)	≤ 50 g												
Protection type to DIN EN 60529 <sup>3)</sup>	IP 67												
IO-Link-specific data													
IO-Link revision	V1.1 / support V1.0												
Transmission rate, baud rate <sup>4)</sup>	38.4 kBaud (COM2)												
Minimum cycle time	2.5 ms												
Process data width	16 bit												
SIO Mode Supported	Yes												
M-sequence capability	PREOPERATE = TYPE_0 OPERATE = TYPE_2_2 ISDU supported												
Download the IO Device Description (IODD) from:	<a href="https://ioddfinder.io-link.com/#/">https://ioddfinder.io-link.com/#/</a>												
Other data													
Supply voltage	9 .. 35 V DC, if PIN 2 = SP2 18 .. 35 V DC, if PIN 2 = analogue output												
when applied acc. to UL specifications	-limited energy – according to 9.3 UL 61010; Class 2; UL 1310 / 1585; LPS UL 60950												
Residual ripple of supply voltage	≤ 5 %												
Current consumption	≤ 1.485 A with active switching outputs ≤ 35 mA with inactive switching output ≤ 55 mA with inactive switching output and analogue output												
Display	4-digit, LED, 7 segment, red, height of digits 7 mm												
Weight	~ 120 g												

**Note:** Reverse polarity protection of the supply voltage, overvoltage, override and short circuit protection are provided.

**FS (Full Scale)** = relative to complete measuring range

<sup>1)</sup> 1000 bar only with mech. connection: G1/4A ISO 1179-2

<sup>2)</sup> Environmental conditions according to 1.4.2 UL 61010-1; C22.2 no. 61010-1

<sup>3)</sup> With mounted mating connector in corresponding protection type

<sup>4)</sup> Connection with unscreened standard sensor line possible up to a max. line length of 20 m.

## Setting options

All terms and symbols used for setting the EDS 3400 as well as the menu structure comply with the specifications in the VDMA Standard for pressure switches.

## Setting ranges for the switching outputs

Measuring range in bar	Lower limit of RP / FL in bar	Upper limit of SP / FH in bar	Min. difference betw. RP and SP & FL and FH	Increment* in bar
-1 .. 1	-0.98	1.00	0.02	0.01
0 .. 2.5	0.025	2.500	0.025	0.005
0 .. 6	0.06	6.00	0.06	0.01
0 .. 10	0.10	10.00	0.10	0.02
0 .. 16	0.20	16.00	0.20	0.05
0 .. 25	0.25	25.00	0.25	0.05
0 .. 40	0.4	40.0	0.4	0.1
0 .. 100	1.0	100.0	1.0	0.2
0 .. 250	2.5	250.0	2.5	0.5
0 .. 400	4	400	4	1
0 .. 600	6	600	6	1
0 .. 1000	10	1000	10	2

\* All ranges shown in the table can be adjusted by the increments shown.



SP = switch point; RP = switch-back point

FL = temperature window lower value; FH = temperature window upper value

## Additional functions

- Switching mode of the outputs adjustable (switch point function or window function)
- Switching direction of the switch outputs adjustable (N/C or N/O)
- Switch-on and switch-back delay adjustable from 0.00 .. 99.99 seconds
- Analogue output signal selectable 4 .. 20 mA or 0 .. 10 V
- Pressure can be displayed in bar, psi, MPa



## Dimensions

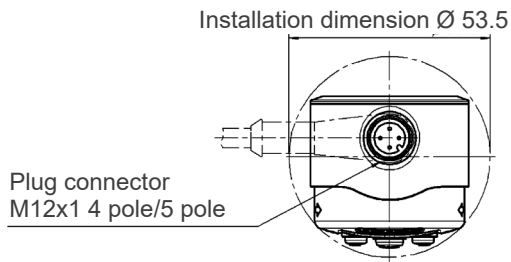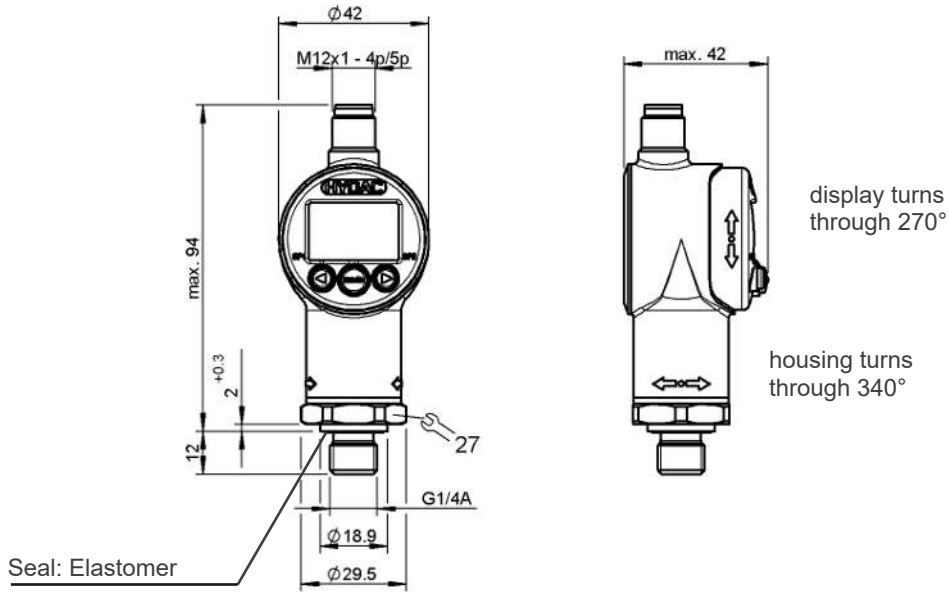

## Mechanical Connection Variants

G1/2 B DIN EN 837  
Tightening torque, recommended 45 Nm

Threaded port DIN 3852-G1/4  
Tightening torque, recommended: 20 Nm



## Pin connections

M12x1, 4 pole	Pin	Output signal: F31	
		Signal	Description
	1	L+	+U <sub>B</sub>
	2	Q2/QA	Switching output (SP2) / analogue output
	3	L-	0 V
	4	Q1/C	Switching output (SP1) / IO-Link Communication

## Model code

EDS 3 4 X 6 - F31 - XXXX - 000

### Mechanical connection

1 = G1/2 B DIN EN 837 <sup>1)</sup>  
4 = G1/4 A ISO 1179-2  
9 = Threaded port DIN 3852-G1/4

### Electrical connection

6 = Plug M12X1, 4 pole (mating connector not included)

### Output

F31 = IO-Link interface

### Measuring ranges in bar

0001 (-1 .. 1); 02.5; 0006; 0010; 0016; 0025; 0040; 0100; 0250; 0400; 0600  
1000 only mech. connection type "4"

### Modification number

000 = Standard

### Note:

<sup>1)</sup> Mechanical connection type "1" only for measuring ranges up to 40 bar.

### Accessories:

Appropriate accessories, such as mating connectors, can be found in the Accessories brochure.

## Note

The information in this brochure relates to the operating conditions and applications described.

For applications or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

### HYDAC ELECTRONIC GMBH

Hauptstraße 27

66128 Saarbrücken/Germany

Telephone +49 (0)6897 509-01

Fax +49 (0)6897 509-1726

E-mail: [electronic@hydac.com](mailto:electronic@hydac.com)

Internet: [www.hydac.com](http://www.hydac.com)

